


500 SERIES AGITATORS

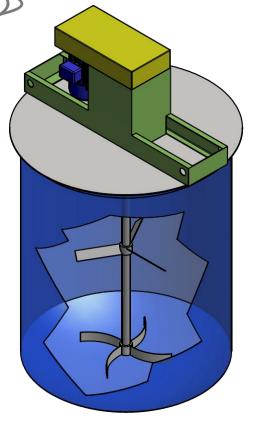

Myers Mixers offers a complete line of tank mounted slow-speed agitators for low to medium viscosity products.

Myers offers a wide variety of tank sizes and configurations, and a wide choice of drives and impellers for its agitators. The possibilities include but are not limited to:

- Jacketed tank with a gate blade impeller equipped with scrapers. Used with hot melt products, this configuration can also be used where cooling is required.
- Two open bow-tie impellers (on a single shaft) for higher viscosity products.
- Two single paddles with scrapers on bottom blade, with horizontal baffles running between paddles.
- Concentric shaft with sweeps on sides and bottom, operating on outside shaft. Two three-prong axial pumper blades on inside shaft.
- Gate blades on walls and on truncated bottom.
- Battery of hydraulically-driven agitators with roof-mounted power unit.
- Slow speed agitator for slurry holding tank.

